

Copy right
BOE MLED Technology Co., Ltd. reserves the right to interpret the product specifications. Without the signed permission of BOE MLED Technology Co., LTD., any other individual or organization shall not excerpt, reprint, copy, translate, edit or publish the specifications in any form. This specification is subject to change without prior notice.

BOE

SPEC. NUMBER

Product Group

REV.

Release Date

Page

-

MLED

0

2023.2.16

1 OF 4

Product Specification

BTQ012S

Rev. 0

BOE MLED Technology Co., Ltd.

SPEC. NUMBER

Product Group

REV.

Release Date

Page

-

MLED



0

2023.2.16

2 OF 4

Product features:

- 1、 Using high-quality LED, high brightness utilization
- 2、 High contrast
- 3、 Lightweight and easy to disassemble
- 4、 Single lamp maintenance、 Low cost

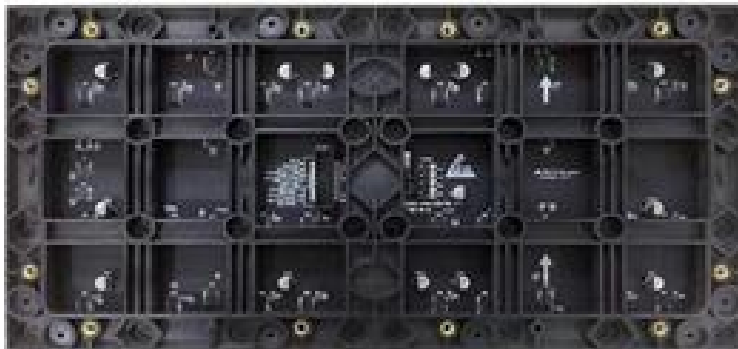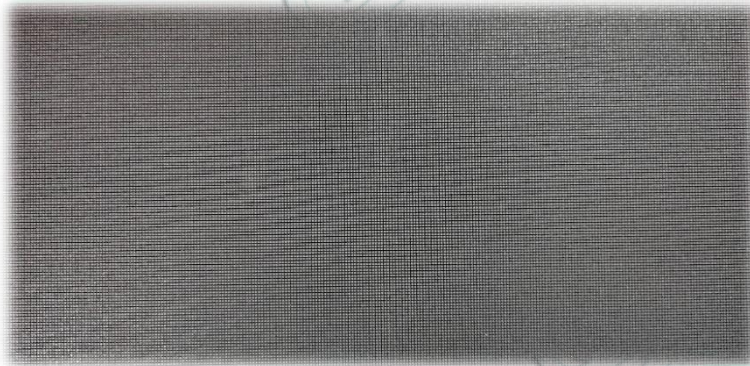

Copy right
 BOE MLED Technology Co., Ltd. reserves the right to interpret the product specifications. Without the signed permission of BOE MLED Technology Co., LTD., any other individual or organization shall not excerpt, reprint, copy, translate, edit or publish the specifications in any form. This specification is subject to change without prior notice.



SPEC. NUMBER	Product Group	REV.	Release Date	Page
-	MLED	0	2023.2.16	3 OF 4

Main Technical Specifications:

	Item	Technical parameters
MDL	Pitch(mm)	1.25
	LED Model	SMD1010
	LED Type	Copper wire
	Resolution	256*128
	Size±Tolerance (mm×mm×mm)	319.9±0.1*159.9±0.1*14.2±0.2
	Weight±Tolerance (kg)	0.543±0.05
	Flatness (mm)	< 0.2
	Pixel density(dot/m ²)	640000
Optical parameters	Brightness(cd/m ²)	≥450
	Color temperature(k)	3000 ~ 15000 (Adjustable)
	Horizontal Angle of view(°)	≥150
	Vertical Angle of view(°)	≥130
	Visual distance	≥1.2
Electrical parameters	Max power consumption of a mode	≤20W
	Average power consumption of a model	≤130W/m ²
	Maximum active power consumption	≤390W/m ²
	Working voltage(V)	5
	Signal input interface type	HUB75

SPEC. NUMBER	Product Group	REV.	Release Date	Page
-	MLED	0	2023.2.16	4 OF 4

Main Technical Specifications:

	Item	Technical parameters
Processing performance	Scanning method	64
	frame frequency(Hz)	50/60
	refresh rate(Hz)	3840
	Drive mode	Constant current driver
	Gray(bit)	13
Running parameters	Continuous working hours	≥7*24hrs, (support continuous uninterrupted display)
	Average time without failures	≥5000hrs
	Discrete runaway point	≤0.0001, 0 (at the factory)
	Continuous runaway point	0
	Blind spot rate	≤0.0001, 0 (at the factory)
	LED Lifetime, Typical(hrs)	30000
	Operating temperature(°C)	-10-+40
	Storage temperature(°C)	-20-+50
	Operating humidity(RH)	10%-60% (No condensation)
	Storage humidity(RH)	10%-65%(No condensation)
Protection level	Ingress Protection	IP30
Certification	ROHS	Meet China ROHS requirements