
1×18 " Subwoofer




This product can be used with This series of 2×10-inch speakers to make a line array.it includes a 4-inch voice coil, 18-inch cone driver. The voice coil has double surface of heat dispersion, which ensures the system operation with high efficiency and durability. the innovated bass reflex structure reduces maximum the airflow noise through the tubes.

Frequency Response




Impedance



Applications

- Main speaker for sound reinforcement system.
- Theatre, auditorium, live performance, places of worship.
- •Stadium,conference room,multipurpose.
- ●Clubs & Disco

Dimension

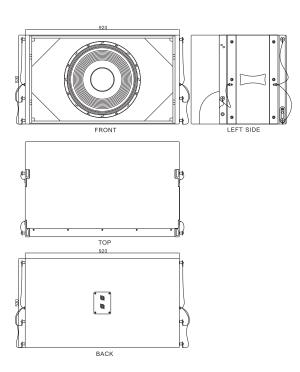

Technical specifications

Frequency response	35Hz-300Hz(-10dB)
Sensitivity(1W/1m)	98dB
Rated power(AES)	900W
Nominal impedance	8 ohm
LF Driver	1 × 18 "
Enclosure	Phase inverted
Enclosure Max SPL	Phase inverted 127dB(continuous), 133dB(peak)
Max SPL	127dB(continuous), 133dB(peak)