
■ Outline:





PTL604 Compact Column Speaker

User Manual

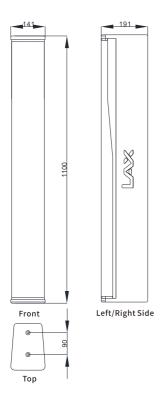

Executive Standard: GB/T 12060.5-2011
Manufacturer: Guangzhou Ruifeng Digital Technology Co., Ltd.



System Application:

Home theater, Live performances Multipurpose hall, Banquet hall Conference halls, Shopping malls, Stadiums Bar, Restaurant, School


Product Features:


PTL604 is a two-way 4-inch compact column speaker. The high frequency is configured with a high-frequency driver loaded with a (120°x 30°) wide-direction horn, and the mid-low frequency is configured with 6 vertically arranged 4-inch high-sensitivity paper cone drivers. The power of the whole speaker reaches 300W, and the Maximum SPL is 127dB.

■ Technical Specification:

Model No.	PTL604
Frequency Response	100Hz-18KHz(-10dB)
Sensitivity (1W/1m)	95dB
Nominal Impedance	6Ω
Rated Power(AES)	300W
Dispersion(H X V)	120°x30°
Maximum SPL	127dB
Dimensions (W X D X H)	142x191x1100MM
Net weight	11Kg

Product Curves:







Frequency Response Curve

Impedance Curve

Connections:





Wiring

Wiring Panel